

Long Ke FSV

Ratings

50Vac - 550Vac

65Vdc - 745Vdc

100KA I.R.

Surge: 50ka 8/20us Peak Current Rating


Operating Temperature: -40°C to +85°C

Approval



UL 1449 3rd Edition (now pending)

RoHs Compliant

FSV type 外盒

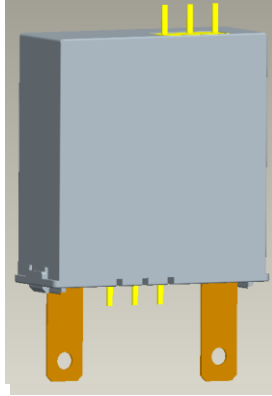

FSV type 內構造

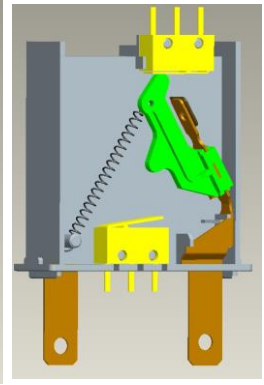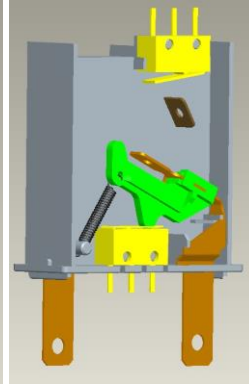

LKS F34/P34 series Specification											
Part number		Maximum Allowable Voltage		Varistor Voltage			Clamping voltage (max.)		Maximum Peak Current		Maximum Energy
FSV type	Plug type	A.C.rms	DC	V1.0mA(V)			VC	IP	In.10times	I Max.	10/1000us
		(V)	(V)	min.	momal	max.	(V)	(A)	(KA)		(JOULE)
F34V050K	此次不申請該項目	50	65	74	82	90	135	300	20	40	156
F34V060K		60	85	90	100	110	165				195
F34V075K		75	100	108	120	132	200				235
F34V150K		150	200	222	246	270	395	300	20	40	480
F34V180K		180	230	256	283	310	470				540
F34V250K		250	320	371	410	449	650				830
F34V275K		275	350	410	453	496	710				920
F34V320K		320	415	459	510	561	845				1060
F34V385K		385	505	558	620	682	1025				1250
F34V420K		420	560	612	680	748	1120				1250
F34V460K		460	615	675	750	825	1240				1280
F34V510K		510	670	738	820	902	1355				1395
F34V550K		550	745	819	910	1001	1500				1475
F type is inside P type											